



REC'D 24 NOV 2004	
WIPO	PCT



INVESTOR IN PEOPLE

The Patent Office
 Concept House
 Cardiff Road
 Newport
 South Wales
 NP10 8QQ

**PRIORITY
 DOCUMENT**
 SUBMITTED OR TRANSMITTED IN
 COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

16 September 2004

BEST AVAILABLE COPY



07NOV03 EB50511-1 010086
P01/7700 0.00-0326052.8

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

BAG 00172/GH/P1

2. Patent application number

(The Patent Office will fill in this part)

0326052.8

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Mahmoud Baghernejad
Flat 8, Hilton House, Amherst Road, London
W13 8NF

Patents ADP number (if you know it)

8749202001

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

Method and Apparatus for Laying a Pipeline

5. Name of your agent (if you have one)

Dr Nicholas J White

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Rouse Patents
Windsor House
Cornwall Road
Harrogate
HG1 2FW
United Kingdom

Patents ADP number (if you know it)

8461159001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

NO

Patents Form 1/77

BEST AVAILABLE COPY

0085298 07-Nov-03 04:05

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	7
Claim(s)	4
Abstract	1
Drawing(s)	9 only 11

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

DR NICHOLAS J WHITE

07/11/03

12. Name and daytime telephone number of person to contact in the United Kingdom

Jane Polizzi 01423 850800

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

BEST AVAILABLE COPY

0085298 07-Nov-03 04:05

TITLE
"METHOD AND APPARATUS FOR LAYING A PIPELINE"

BRIEF DESCRIPTION OF THE INVENTION

5 The present invention relates to a method and apparatus for installation of offshore pipelines.

FIELD OF THE INVENTION

10 The installation of offshore pipelines for transportation of hydrocarbon from an offshore location generally involves the use of specialised pipe laying barges to lay the pipe segments on the ocean bed.

15 A common method for laying the pipeline involves the use of pipe laying barges carrying short lengths of pipe, for example 12 metres, which are welded end to end along the length of the pipeline on the pipe laying barge. This method requires the barges to be specially equipped, to both carry the pipe segments and weld and lay the segments.

20 It is common for such pipe laying barges to require crews of around 200 people of varying technical expertise to carry out the operation. It is typical for such operations to be able to lay around 1 to 2 kilometres of pipeline per day at a cost (based on current figures) of around 0.3 to 0.5 million USD per day.

25 The current invention relates to a method of installing offshore pipeline which does not require the use of the above mentioned specialised pipe laying barges, thus reducing the cost of pipe laying operations, and which allows a longer length of pipeline to be installed per day.

SUMMARY OF THE INVENTION

In accordance with one aspect of the present invention there is provided a method for laying an underwater pipeline comprising the steps of :

- 5 constructing lengths of pipeline by endwise connection of a plurality of pipe segments;
- securing bend restriction means to said lengths of pipeline, the bend restriction means being arranged to prevent the lengths of pipeline from bending by more than a predetermined maximum amount;
- 10 securing flotation means to the lengths of pipeline such that the lengths of pipeline are held adjacent the surface of the ocean;
- towing the lengths of pipeline to the desired location; and
- connecting each length of pipeline to an adjacent length of pipeline and altering the buoyancy of the flotation means or releasing the flotation means from each length of
- 15 pipeline so that the length of pipeline sinks to the ocean floor.

In accordance with another aspect of the present invention there is provided apparatus for laying an underwater pipeline comprising:

- bend restriction means arranged to be secured to lengths of pipeline formed by endwise connection of a plurality of pipe segments, the bend restriction means being
- 20 arranged to prevent the lengths of pipeline from bending by more than a predetermined maximum amount; and
- flotation means arranged to be secured to the lengths of pipeline such that the lengths of pipeline are held adjacent the surface of the ocean;

wherein the flotation means are releasable from the length of pipeline or may have their buoyancy altered such that the lengths of pipeline may be towed to a desired location and sunk to the ocean floor by release of the flotation means or altering the buoyancy of the flotation means.

5

DESCRIPTION OF THE DRAWINGS

The present invention will now be described, by way of example, with reference to the accompanying drawings, in which:

10 Figure 1 is a side view of a length of pipeline prepared for laying according to the present invention;

Figure 2 is a side view of the bend restriction means of Figure 1;

Figure 3 is a side view of a segment of the bend restriction means of Figure 1;

Figure 4 is a side view of a length of pipeline prepared for laying according to an
15 alternative embodiment of the present invention;

Figure 5 is a side view of the bend restriction means of Figure 4;

Figure 6a is a side view of a segment of the bend restriction means of Figure 4;

Figure 6b is a side view of an alternative embodiment of a segment of the bend
restriction means of Figure 4;

20 Figure 6c is a side view of a further alternative embodiment of a segment of the bend restriction means of Figure 4;

Figure 7a is a side view of pipeline location means for use with the method of the present invention;

Figure 7b is a top view of the pipeline location means of Figure 7a;

BEST AVAILABLE COPY

Figure 8 is a side view of the pipeline of Figure 1 during laying of a length of pipeline;

Figure 9 is a side view of the connection of adjacent lengths of pipeline; and

Figure 10 is a side view of the release of the bend restriction means.

5

DESCRIPTION OF THE INVENTION

Referring to the Figures, there is shown a method of and apparatus for laying an underwater pipeline 10 comprising a plurality of pipe segments 12. The pipe segments 12 are endwise connected onshore by a known means, such as welding, to form one or more lengths of pipeline 14. The lengths of pipeline 14 are fabricated in the total length desired for the pipeline 10 or in multiples of a length that would, in total, form the desired length of the pipeline 10. For example, the lengths of pipeline 14 may be in the order of 5 to 10 kilometres. The use of such lengths of pipeline 14 would allow large sections of the pipeline 10 to be installed in a single operation.

Following construction of each of the lengths of pipeline 14, a bend restriction means 16 is secured along the length of pipeline 14. The bend restriction means 16 comprises a plurality of endwise connected bend restrictor segments 18. Figures 2 and 3 show an embodiment of the bend restrictor segments 18 and the bend restriction means 16 shown in Figure 1. The bend restrictor segments 18 each comprise a cylindrical element 20 having longitudinally opposed hemispherical ends 22. Each cylindrical element 20 is secured to adjacent cylindrical elements 20 by a flexible elongate member 24, such as a chain or cable, connecting between points located centrally on the hemispherical ends 22.

The length of each flexible elongate member 24 and the dimensions of the cylindrical elements 20 are arranged so that when a cylindrical element 20 is such that the longitudinal axis of the cylindrical element 20 has moved from being coaxial with the longitudinal axis of a connected cylindrical element 20 by a predetermined angle, the hemispherical ends 22 of those connected cylindrical elements 20 come against each other preventing further movement. By setting the maximum angle allowed between the longitudinal axes of the adjacent cylindrical elements 20 for cylindrical elements 20 of known length, the bend restriction means 16 will only bend to a limited degree, as shown in Figure 3. The bend restriction means 16, when secured along the length of pipeline 14 would thereby prevent excessive bending of the length of pipeline 14 and would allow the setting of a minimum bend radius for the length of pipeline 14. As shown in Figure 1, the bend restriction means 16 is arranged adjacent the length of pipeline 12 and connected along the length by connections between each bend restrictor segment 18 and the length of pipeline 14.

The method and apparatus for laying the pipeline 10 also involves the use of flotation means 26 attached to the length of pipeline 12 along the length. In the embodiment shown in Figure 1, the flotation means 26 comprises a plurality of flotation modules 28, each flotation module 28 being connected to a respective bend restrictor segment 18. The flotation means 26 is arranged such that the length of pipeline 14 will float adjacent the surface of the ocean. The length of pipeline 14 can then be secured to a suitable pull barge or tug boat 29 and towed to the desired location. It is noted that the pull barge or tug boat 29 required will not need to be of the specialised type conventionally used in pipe laying operations, thereby saving costs.

Figure 4 shows an alternative embodiment of the invention as shown in Figure 1. In this embodiment, the bend restriction means 16 comprises bend restrictor segments 18 as shown in Figures 6a, 6b and 6c. The bend restrictor segments 18 are secured by flexible elongate members 24 and function to restrict bending of the lengths of pipeline 14 generally as described previously. While the bend restrictor segments 18 do not have the hemispherical ends 22 of the bend restrictor segments 18 shown in Figures 2 and 3, the longitudinally opposed ends 31 perform the same function. The bend restrictor segments 18 each comprise a frame 30 supporting an internal flotation module 32. The frame 30 comprises a cylinder or a prism having a cross section of any suitable shape. For example, the frame 30 of Figure 5b comprises a hexagonal prism and the frame 30 of Figure 5c comprises a rectangular prism. The flotation modules 32 are located inside the frame 30 along the longitudinal axis of the bend restrictor segment 18. Each of the bend restrictor segments 18 is connected to adjacent bend restrictor segments 18 by flexible elongate members 24 connected between the adjacent ends of the flotation modules 32. In this embodiment, separate flotation modules are therefore not required.

The lengths of pipeline 14 are towed to the desired location which will preferably have been prior marked based on surveys of the ocean floor. Markers 34 are shown in Figures 7a and 7b may be used to mark the location of the desired route of the pipeline 10.

As shown in Figure 8, using the embodiment of the invention shown in Figure 1, the length of pipeline 14 is then laid by simply disconnecting the flotation modules 28 from the bend restriction means 16, thereby allowing the length of pipeline 14 to sink to the ocean floor. The bend restriction means 16 prevents excessive bending of the

length of pipeline 14 both during the towing operation and as the length of pipeline 14 sinks to the ocean floor, thus preventing damage. Alternatively, using the embodiment in Figure 4, the buoyancy of the flotation modules 28 may be altered by filling with sea water to allow the length of pipeline 14 to sink to the ocean floor.

- 5 Once on the ocean floor, the bend restriction means 16 is removed from each length of pipeline 14 with the exception of a portion of the bend restriction means 16 adjacent the ends of the length of pipeline 14. The ends of adjacent lengths of pipeline 14 are then raised to the surface, as shown in Figure 9, by a davit lift and connected in a known manner. The portions of the bend restriction means 16 adjacent the ends of
- 10 the lengths of pipeline 14 prevents damage to the lengths of pipeline 14 during the tie-in operation.

The connected lengths of pipeline 14 are then placed back on the ocean floor and the portions of the bend restriction means 16 adjacent the ends of the length of pipeline 14 are removed. The bend restriction means 16 may be released from the lengths of

15 pipeline 14 by any suitable means, such as a snatch block or a diver assisted operation.

Modifications and variations as would be apparent to a skilled addressee are deemed to be within the scope of the present invention.

CLAIMS

1. A method for laying an underwater pipeline comprising the steps of:
constructing lengths of pipeline by endwise connection of a plurality of pipe segments;
5 securing bend restriction means to said lengths of pipeline, the bend restriction means being arranged to prevent the lengths of pipeline from bending by more than a predetermined maximum amount;
securing flotation means to the lengths of pipeline such that the lengths of pipeline are held adjacent the surface of the ocean;
10 towing the lengths of pipeline to the desired location; and
connecting each length of pipeline to an adjacent length of pipeline and altering the buoyancy of the flotation means or releasing the flotation means from each length of pipeline so that the length of pipeline sinks to the ocean floor.
2. A method for laying an underwater pipeline in accordance with claim 1, wherein
15 the bend restriction means comprises a plurality of bend restrictor segments, each bend restrictor segment being connected to adjacent bend restrictor segments by a flexible elongate member, the method including the steps of securing each bend restrictor segment to the length of pipeline, along the length pipeline.
3. A method for laying an underwater pipeline in accordance with claim 2, wherein
20 the flotation means comprises a plurality of flotation modules connected in series, the method including the steps of securing each of the flotation modules to a respective bend restrictor segment.
4. A method for laying an underwater pipeline in accordance with any one of claims 1 to 3, including the step of removing the bend restriction means from each of the

lengths of pipeline with the exception of a portion of the bend restriction means adjacent an end of the length of pipeline after each length of pipeline has descended to the ocean floor.

5 5. A method for laying an underwater pipeline in accordance with Claim 4, including the step of raising the ends of adjacent lengths of pipeline to the ocean surface, connecting said adjacent ends together and lowering the connected adjacent ends to the ocean floor.

6. A method of laying an underwater pipeline in accordance with Claim 5, including the step of removing the portions of the bend restriction means from the ends of the
10 lengths of pipeline once the adjacent lengths of pipeline have been connected and lowered to the ocean floor.

7. A method for laying an underwater pipeline in accordance with any one of claims 1 to 6, wherein altering the buoyancy of the flotation means comprises at least partially filling the flotation means with sea water.

15 8. A method for laying an underwater pipeline in accordance with any one of claims 1 to 7 including the step of placing a plurality of floating markers secured to locations on the ocean floor along the proposed route of the underwater pipeline.

9. Apparatus for laying an underwater pipeline comprising:

20 bend restriction means arranged to be secured to lengths of pipeline formed by endwise connection of a plurality of pipe segments, the bend restriction means being arranged to prevent the lengths of pipeline from bending by more than a predetermined maximum amount; and

flotation means arranged to be secured to the lengths of pipeline such that the lengths of pipeline are held adjacent the surface of the ocean;

wherein the flotation means are releasable from the length of pipeline or may have their buoyancy altered such that the lengths of pipeline may be towed to a desired location and sunk to the ocean floor by release of the flotation means or altering the buoyancy of the flotation means.

5 10. Apparatus for laying an underwater pipeline in accordance with claim 9, wherein the bend restriction means comprises a plurality of bend restrictor segments connected in series, each bend restrictor segment being connected to adjacent bend restrictor segments by a flexible elongate member, the length of the flexible elongate member and the dimensions of the bend restrictor segments being arranged such that the bend
10 restriction means will bend to no more than a predetermined minimum bend radius.

11. Apparatus for laying an underwater pipeline in accordance with claim 10, wherein the flotation means comprises a plurality of flotation modules connected in series, each flotation module being connected to a respective bend restrictor segment.

12. Apparatus for laying an underwater pipeline in accordance with claim 10 or 11
15 wherein each of the bend restrictor segments comprises a solid cylindrical element having longitudinally opposed hemispherical ends, the flexible elongate members being connected between adjacent cylindrical elements at points located centrally on adjacent hemispherical ends.

13. Apparatus for laying an underwater pipeline in accordance with claim 10 or 11,
20 wherein each of the bend restrictor segments comprises a frame having one of the flotation modules mounted within.

14. Apparatus for laying an underwater pipeline in accordance with claim 13, wherein the frame is constructed as a cylinder or prism and the flotation module is located along a central longitudinal axis of the frame.


15. Apparatus for laying an underwater pipeline in accordance with claim 14, wherein the flexible elongate members are connected between adjacent ends of the flotation modules of adjacent bend restrictor segments.
16. Apparatus for laying an underwater pipeline substantially as hereinbefore
5 described with reference to the accompanying drawings.
17. A method of laying an underwater pipeline substantially as hereinbefore described with reference to the accompanying drawings.

ABSTRACT



A method and apparatus for laying an underwater pipeline. The method includes the steps of constructing lengths of pipeline by endwise connection of a plurality of pipe segments and securing bend restriction means along the length of said lengths of pipeline. The bend restriction means is arranged to prevent the lengths of pipeline from bending by more than a predetermined maximum amount. Flotation means are secured to the lengths of pipeline such that the lengths of pipeline are held adjacent the surface of the ocean and the lengths of pipeline are towed to the desired location. Each length of pipeline is connected to an adjacent length of pipeline and the flotation means are released from each length of pipeline so that the length of pipeline sinks to the ocean floor.

BEST AVAILABLE COPY

0085298-07 Nov-03 04:05

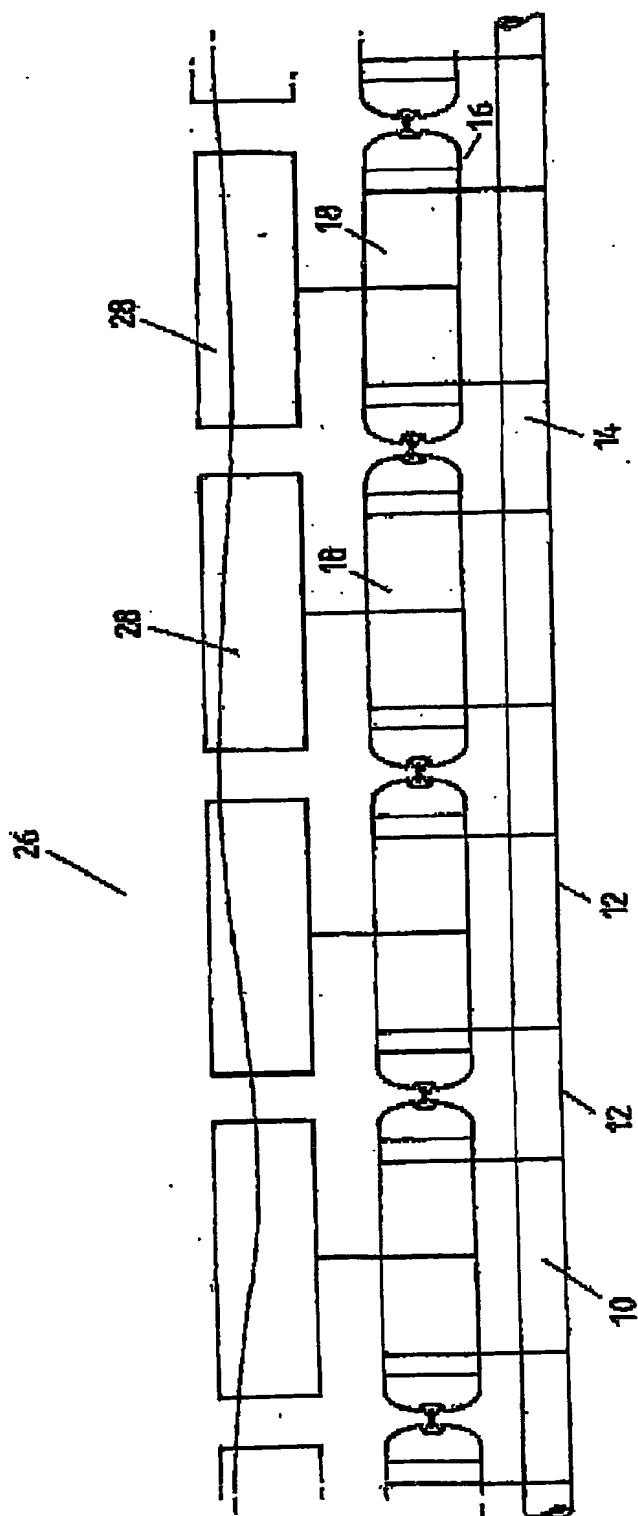FIG. 1

BEST AVAILABLE COPY

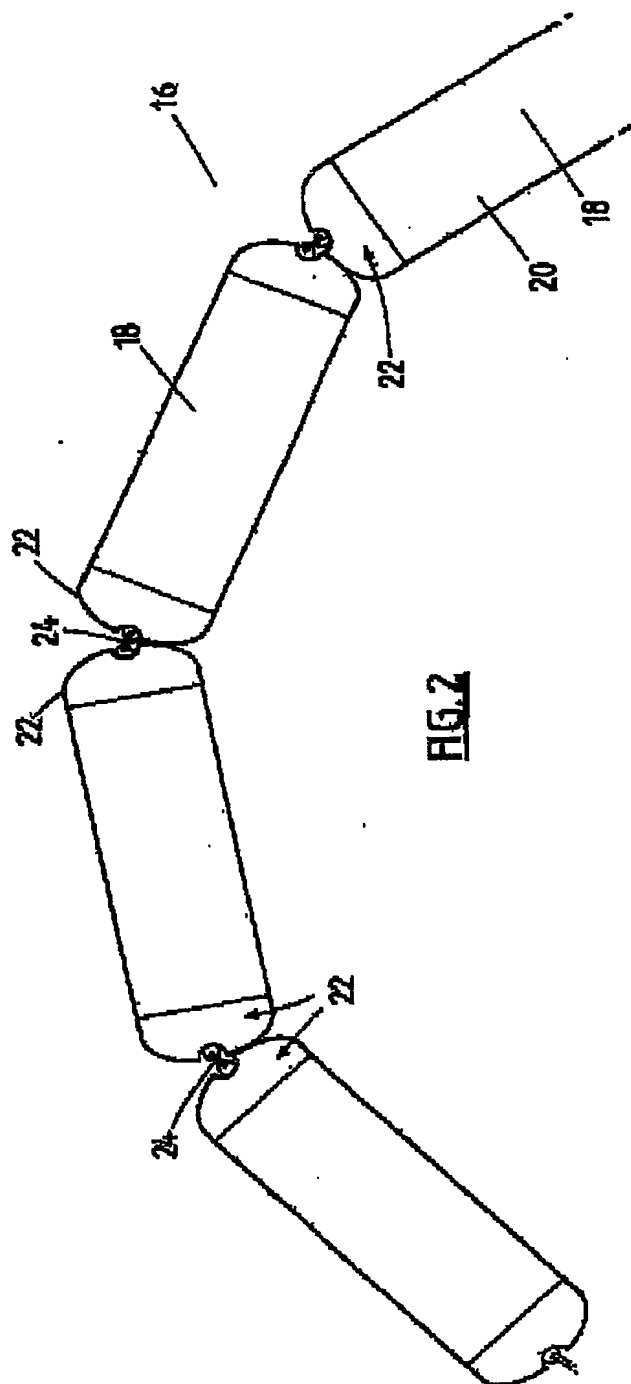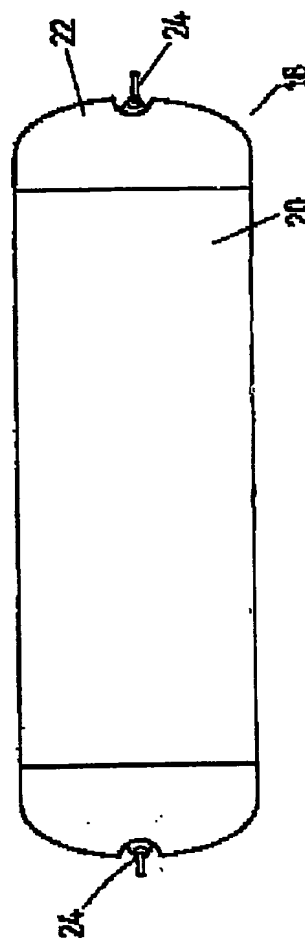**FIG. 2****FIG. 3**

BEST AVAILABLE COPY

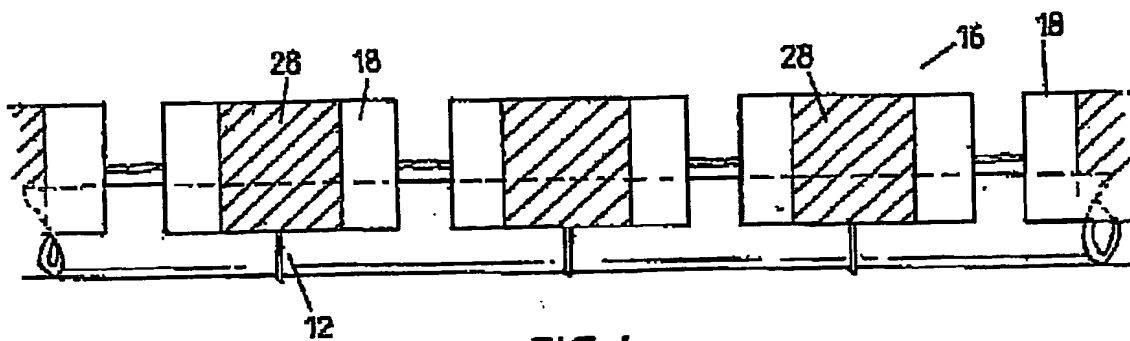


FIG. 4

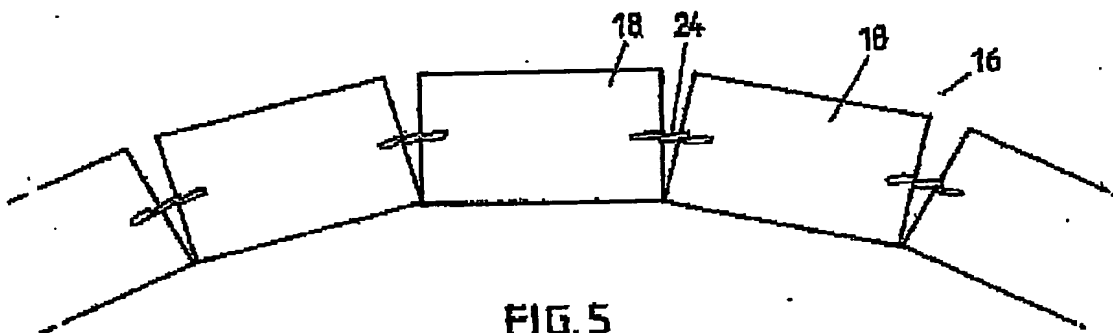


FIG. 5

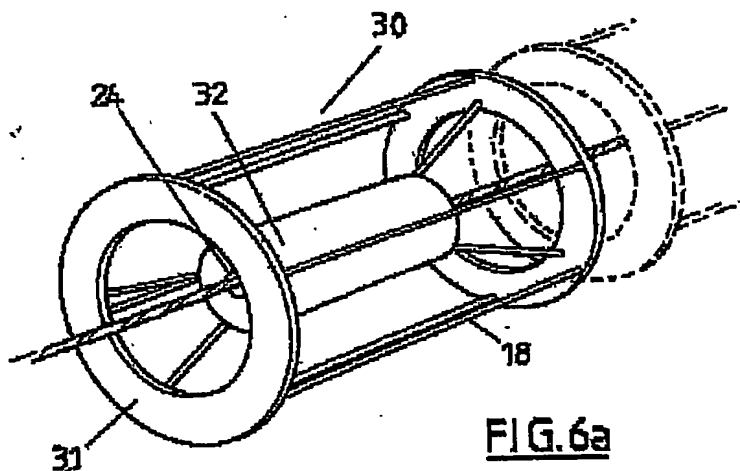
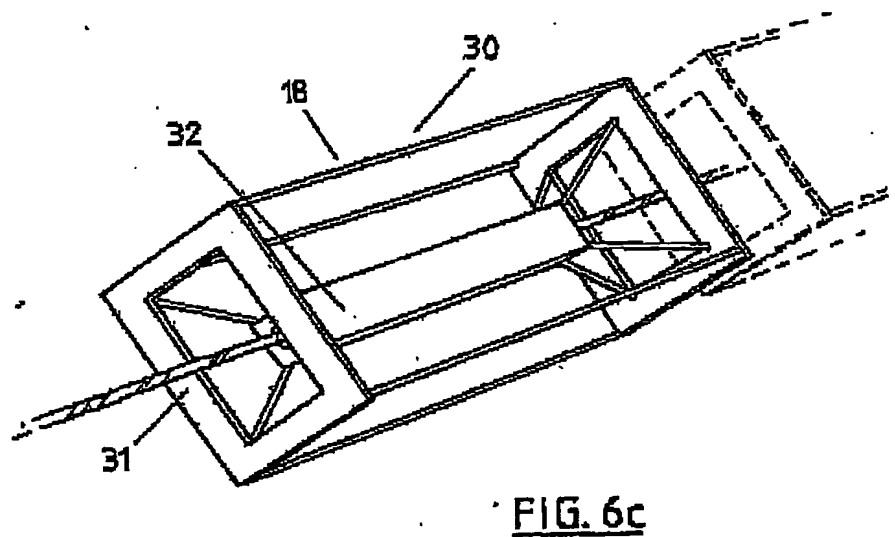
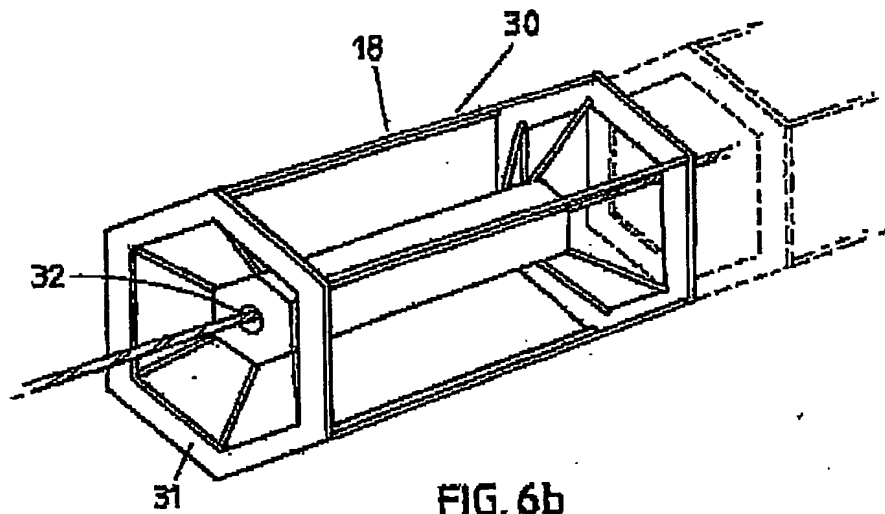


FIG. 6a

BEST AVAILABLE COPY



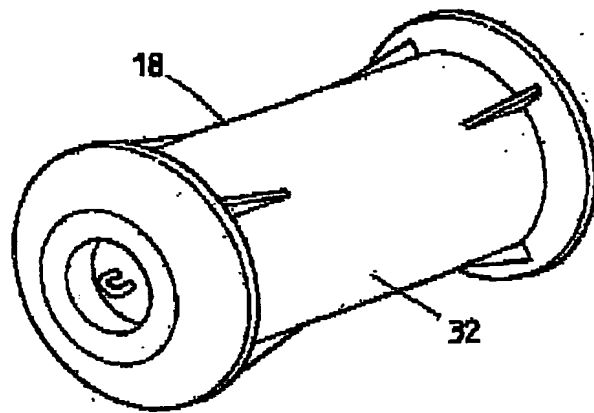
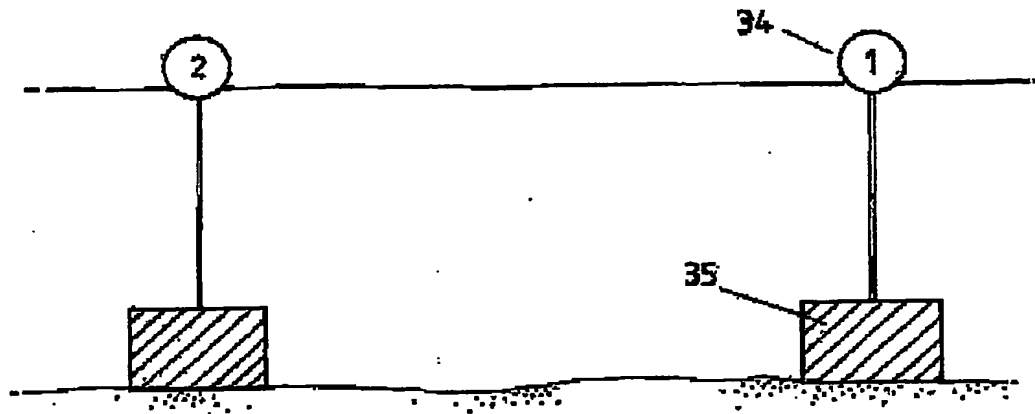
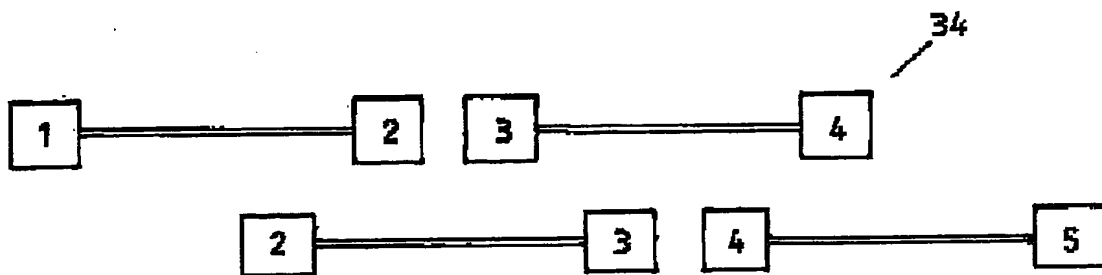
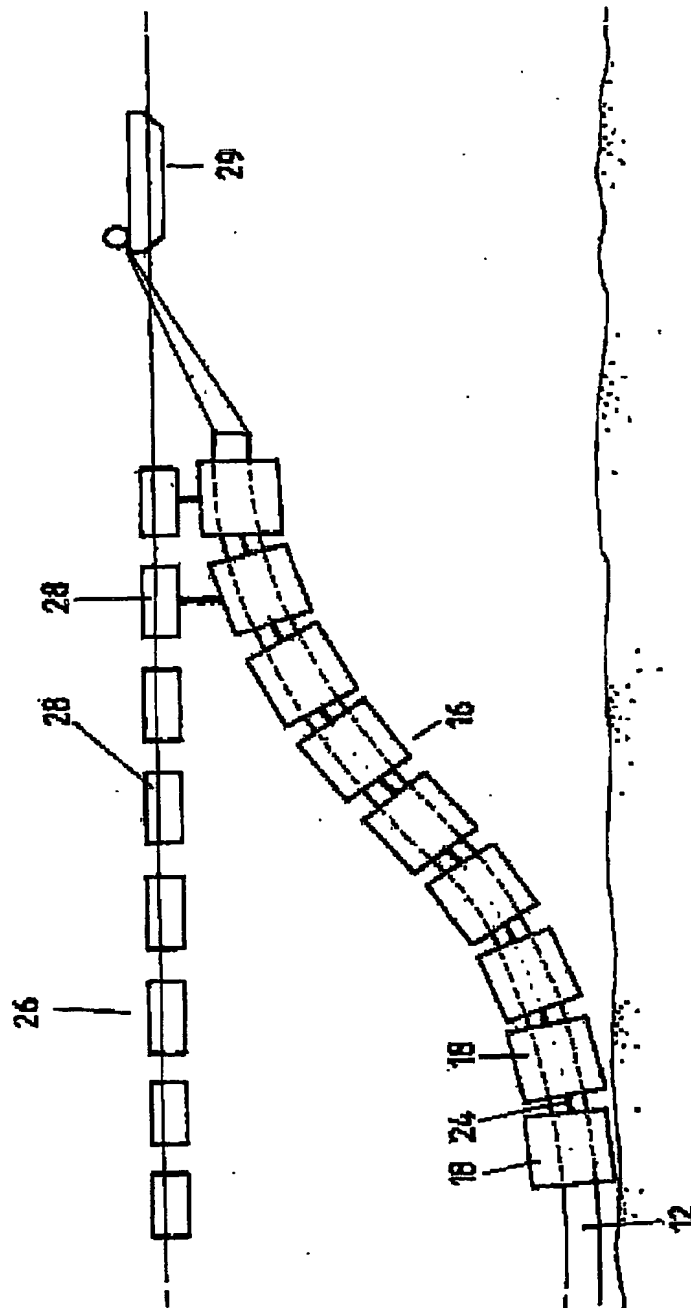


FIG. 6d

**FIG. 7a****FIG. 7b**

**FIG. 8**

BEST AVAILABLE COPY

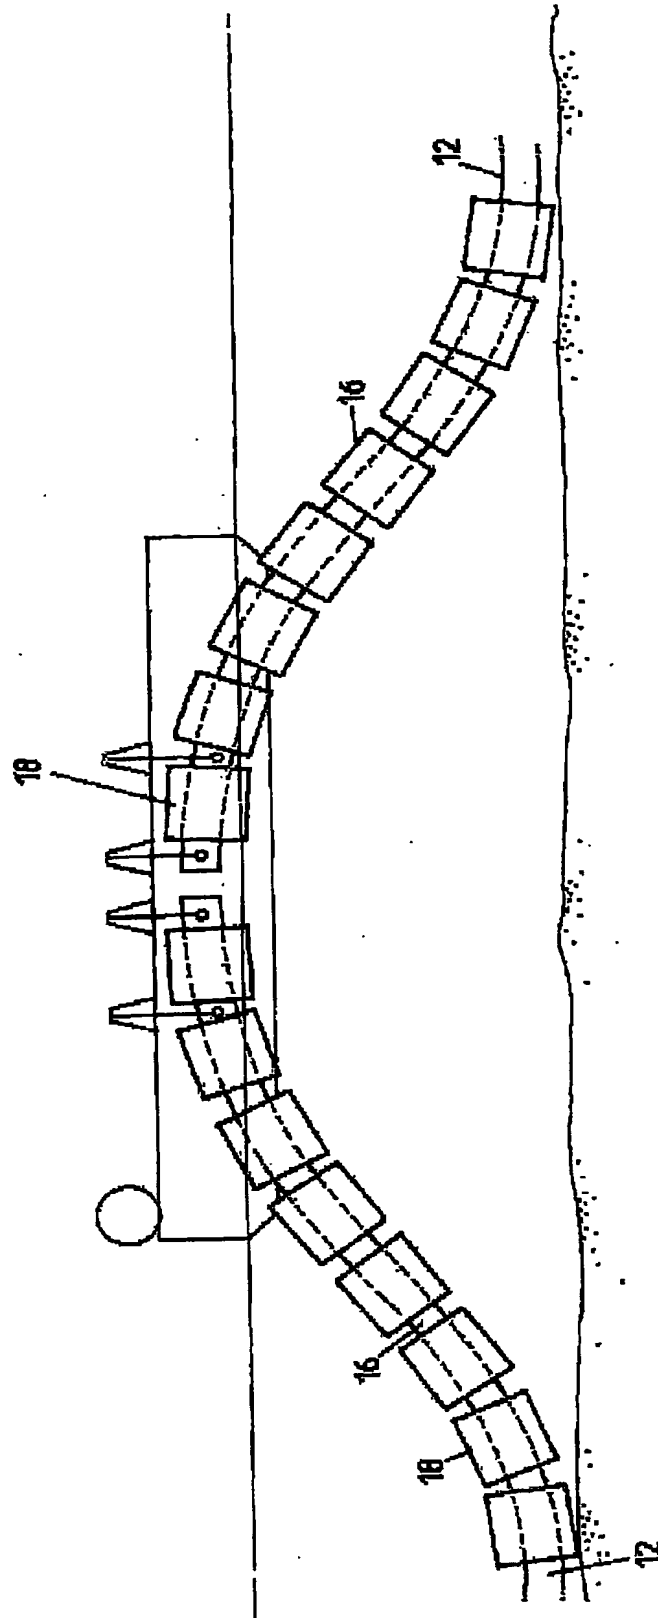


FIG. 2

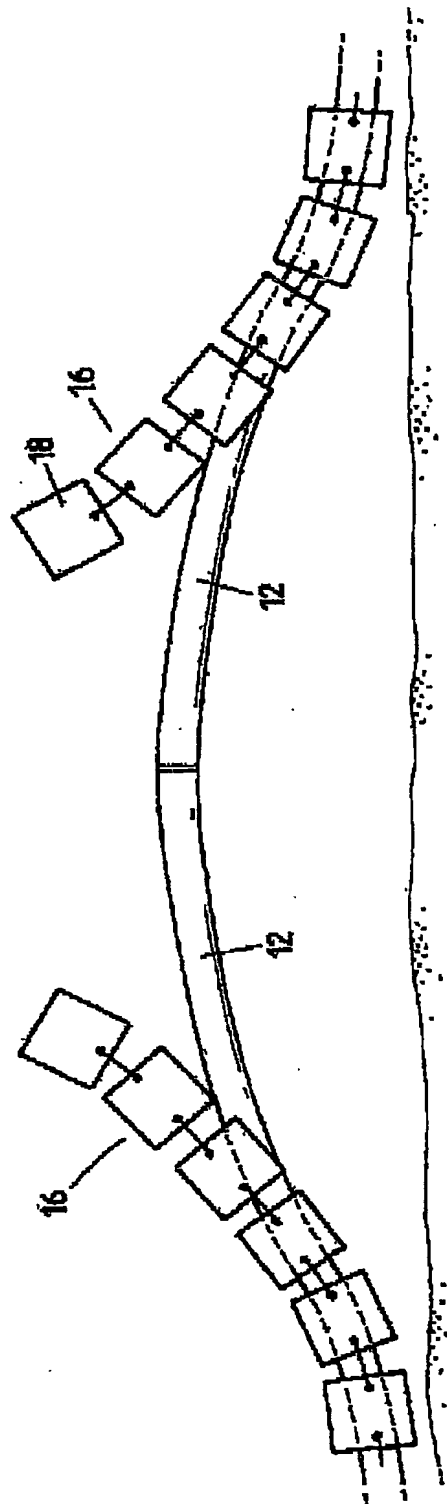


FIG. 10

BEST AVAILABLE COPY